

VHF/UHF S65-8282-296



Description

S65-8282-296: High speed, low drag, multifunction antenna. The broadband operational frequency enables use with VHF/UHF systems. This antenna is used as a replacement for the legacy S65-8282-78, S65-8282-781 and S65-8282-98; with phase matching for DF Systems, $\pm 3^\circ$ max at 20-150 MHz and $\pm 4^\circ$ max at 150-512 MHz.

FEDERAL & MILITARY SPECS: RTCA DO-160G and MIL-HDBK-5400.

Specifications

Electrical


Frequency	20-512 MHz
VSWR	$\leq 3.5:1$ (20-30 MHz) $\leq 2.6:1$ (30-100 MHz) $\leq 2.3:1$ (100-512 MHz)
Polarization	Vertical
Pattern	Omnidirectional in Azimuth; Cosinusoidal in Elevation
Impedance	50 Ω
Power Handling	40 Watts
Phase Tracking (Swept)	$\pm 3^\circ$ max. (20-150 MHz) $\pm 4^\circ$ max. (150-512 MHz)

Mechanical

Weight	3.0 lbs.
Height	14.20 in.
Length	12.55 in.
Width	4.50 in.
Material	6061 T6 Aluminum Alloy / Fiberglass
Finish	Skydrol Resistant Enamel
Connector	TNC Female

Environmental

Temperature	-55°C (-67°F) to +85°C (+185°F)
Altitude	70,000 ft.

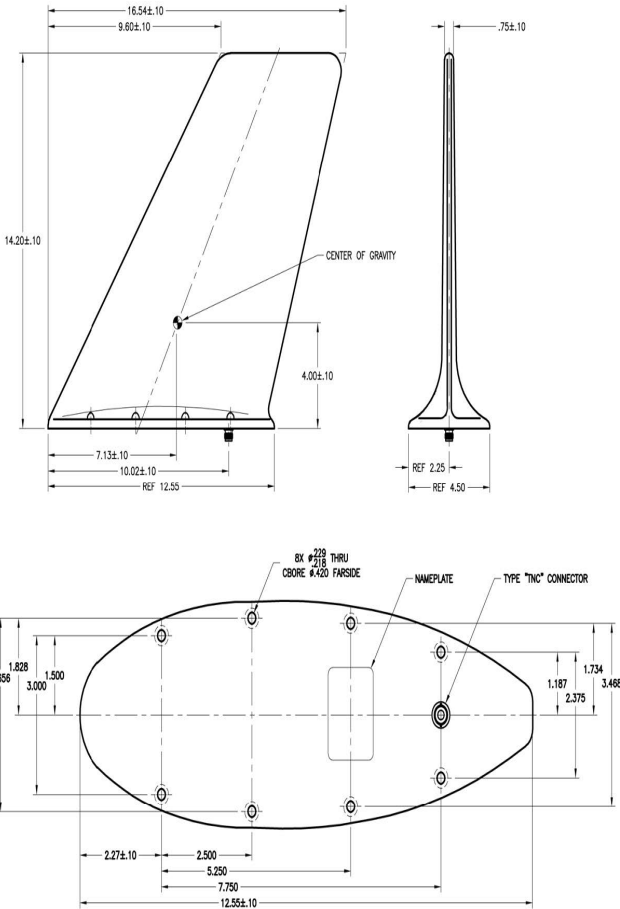

Please Note: For REFERENCE ONLY
Contact Sensor Systems for latest drawing



A HEICO COMPANY

Website: www.sensorantennas.com

Phone: 818-341-5366