

VHF/UHF S65-111-309



Description

This is an all-metal, dual VHF/UHF antenna. The antenna is extremely rugged in construction to provide a high degree of structural rigidity and protection from rain erosion as well as sand and gravel abrasion.

The **S65-111-309** antenna is DC grounded to eliminate "P" static and is hermetically sealed for a long service life.

The antenna is interchangeable with the Collins 37R-2U antenna.

Federal & Military Certifications:

TSO C37b, C38b, C59, MIL-A-6271A, MIL-A-9094C, MIL-A-7772B (ASG), MIL-E-5272C, and MIL-E-5400.

Specifications

Electrical


Frequency	VHF: 116-152 MHz UHF: 225-400 MHz
VSWR	VHF: $\leq 2.3:1$ UHF: $\leq 2.6:1$
Polarization	Vertical
Pattern	Omnidirectional in Azimuth Cosinusoidal in Elevation
Impedance	50 Ω
Power	1000 Watts Peak
Isolation	20 dB
Efficiency	85%

Mechanical

Weight	4.8 lbs.
Height	14.65 in.
Length	11.64 in.
Width	3.17 in.
Material	A356-T61 Aluminum Alloy Casting
Finish	Skydrol Resistant Polyurethane Enamel
Connector	VHF: BNC Female UHF: TNC Female

Environmental

Temperature (Operating)	-73°C (-100°F) to +149°C (+300°F)
Altitude	60,000 ft.

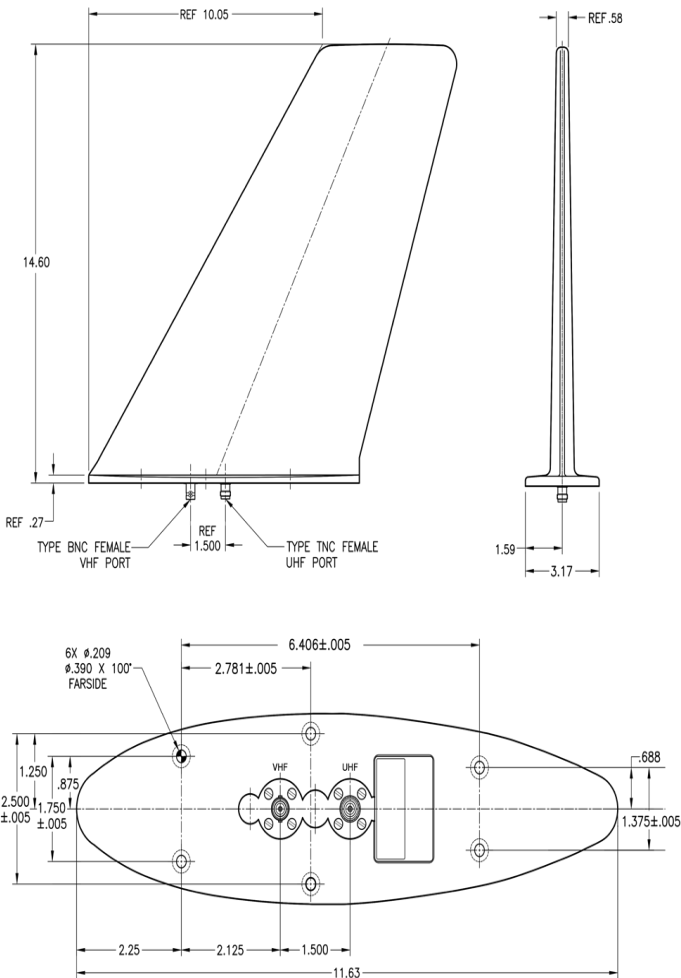

Please Note: For REFERENCE ONLY
Contact Sensor Systems for latest drawing



A HEICO COMPANY

Website: www.sensorantennas.com

Phone: 818-341-5366